

MDIForm1

Child-Form

Frame1

TimoSoft:

VB:

Load St...orm

Das zweite mal in die Textbox klicken (Klicks können auch Minuten auseinander entfernt sein). Dabei wird das LostFocus-Event gefeuert, die Textbox bleibt aber weiterhin editierbar!

Wird die zweite Textbox angeklickt, wird kein Validate-Event (der ersten Box) gefeuert.

(Allgemein)

(Deklarationen)

```
Option Explicit
```

```
Private WithEvents oSubCls As itvsSubclass.clsSubclass
```

```
Private Const WM_MOUSEACTIVATE As Long = &H21
```

```
Private Sub cmdTest_Click()
```

```
    frmStandAlone.Show
```

```
End Sub
```

```
Private Sub Form_Load()
```

```
    ' SubClassing von Frame1
```

```
    Set oSubCls = New itvsSubclass.clsSubclass
```

```
    oSubCls.StartSubclass fraFocus.hWnd
```

```
End Sub
```

```
Private Sub Form_Unload(Cancel As Integer)
```

```
    ' SubClassing beenden
```

```
    oSubCls.StopSubClass
```

```
End Sub
```

```
Private Sub oSubCls_MessageCaught(ByVal hWnd As Long, uMsg As Long, wParam As Long, lParam As Long, Cancel As Boolean)
```

```
    Select Case uMsg
```


```
        Case WM_MOUSEACTIVATE
```

```
            ' Ereignis unterdrücken
```

```
            Cancel = True
```

```
    End Select
```

```
End Sub
```

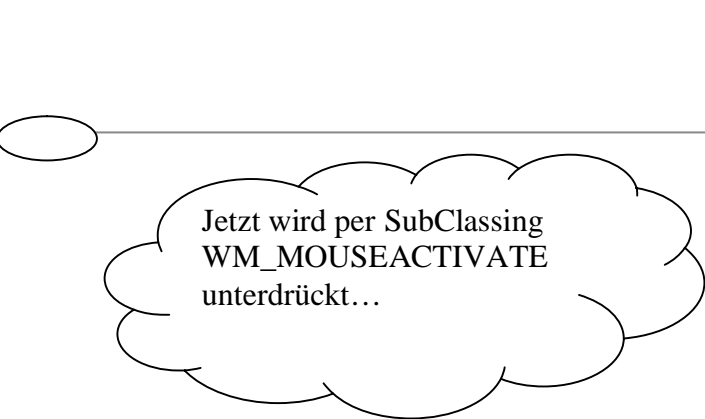

Jetzt wird per SubClassing
WM_MOUSEACTIVATE
unterdrückt...

The image shows a Windows-style MDI application. The main window is titled "MDIForm1" and contains a child window titled "Child-Form". Inside "Child-Form", there is a container labeled "Frame1". Within "Frame1", there are two labels: "TimoSoft:" and "VB:". Next to "TimoSoft:" is a yellow rectangular text box with a small circular cursor at its right edge. Below the "TimoSoft:" label is a white rectangular text box next to the "VB:" label. At the bottom of the "Child-Form" is a button labeled "Load StandAlone-Form".

Jetzt kann man in der Textbox so oft klicken, wie man will. LostFocus wird erst aufgerufen, wenn die Box wirklich den Focus verliert

